

LOJACK EARLY WARNING® KEY PASS BATTERY REPLACEMENT

Note: there are three Early Warning Key Pass Models. The below instructions apply to all models.



figure 1



figure 2

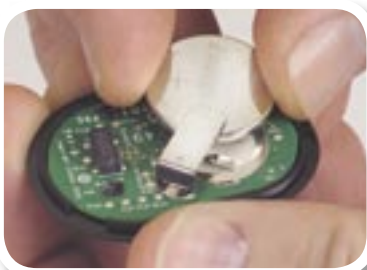


figure 3

To ensure optimum performance of your system and uninterrupted coverage, we recommend changing your batteries every six months or when you change the batteries in other household items like your smoke detectors.

You will need one Lithium watch battery (#CR-2032), which can be purchased at most retail stores and electronic retailers.

1. Open Key Pass: If the back of your Key Pass has a screw, use a small Phillips head screwdriver to remove the screw. If the back of your Key Pass does not have a screw, insert a small coin into the indented slot on the side of the case. Gently pry apart the two halves of the Key Pass. You have now exposed the interior of the Key Pass. You will notice a circular battery retained by a battery holder.

2. Remove Old Battery: Push the battery out of its holder using a non-metal tool. Notice the + sign on the face of the battery. Discard the old battery.

3. Replace Battery: Slide a new battery into the battery holder. The battery MUST be installed with the + sign facing up. The red light on the face of the Key Pass should flash several times immediately after properly installing a battery.

4. Close the Key Pass: Reassemble the Key Pass by snapping the two halves of the case together. If your case has a screw, insert the screw into its hole then tighten the screw until it is just snug.

LOJACK®